查询IRFI9610GPBF供应商

International
IOR Rectifier

PD - 95504

IRFI9610GPbF

HEXFET® Power MOSFET

- Isolated Package
- High Voltage Isolation=2.5KVRMS ⑤
- Sink to Lead Creepage Dist.=4.8mm
- P-Channel
- Dynamic dv/dt Rating
- Low thermal Resistance
- Lead-Free



V_{DSS} = -200V

$R_{DS(on)}$ = 3.0Ω

I_D = -2.0A

Description

Third Generation HEXFETs from International Rectifier provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.Third Generation HEXFETs from International Rectifier provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The TO-220 Fullpak eliminates the need for additional insulating hardware in commercial-industrial applications. The moulding compound used provides a high isolation capability and a low thermal resistance between the tab and external heatsink. This isolation is equivalent to using a 100 micron mica barrier with standard TO-220 product. The Fullpak is mounted to a heatsink using a single clip or by a single screw fixing.

TO-220 Full-Pak

Absolute Maximum Ratings

	Parameter	Max.	Units
I_D @ T_C = 25°C	Continuous Drain Current, V_{GS} @ -10V	-2.0	A
I_D @ T_C = 100°C	Continuous Drain Current, V_{GS} @ -10V	-1.3	
I_{DM}	Pulsed Drain Current ①	-8.0	
P_D @T_C = 25°C	Power Dissipation	27	W
	Linear Derating Factor	0.22	W/°C
V_{GS}	Gate-to-Source Voltage	± 20	V
E_{AS}	Single Pulse Avalanche Energy②	100	mJ
I_{AR}	Avalanche Current①	-2.0	A
E_{AR}	Repetitive Avalanche Energy①	2.7	mJ
dv/dt	Peak Diode Recovery dv/dt ③	-11	V/ns
T_J T_{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	°C
	Soldering Temperature, for 10 seconds	300 (1.6mm from case)	
	Mounting torque, 6-32 or M3 screw	10 lbf•in (1.1N•m)	

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	–––	4.6	°C/W
$R_{\theta JA}$	Junction-to-Ambient	–––	65	

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	-200	–––	–––	V	V_{GS} = 0V, I_D = -250µA
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	–––	-0.22	–––	V/°C	Reference to 25°C, I_D = -1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	–––	–––	3.0	Ω	V_{GS} = -10V, I_D = -1.2A ④
$V_{GS(th)}$	Gate Threshold Voltage	-2.0	–––	-4.0	V	V_{DS} = V_{GS}, I_D = -250µA
g_{fs}	Forward Transconductance	0.7	–––	–––	S	V_{DS} = -50V, I_D = -1.2A
I_{DSS}	Drain-to-Source Leakage Current	–––	–––	-100	µA	V_{DS} = -200V, V_{GS} = 0V
		–––	–––	-500		V_{DS} = -160V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	–––	–––	100	nA	V_{GS} = 20V
	Gate-to-Source Reverse Leakage	–––	–––	-100		V_{GS} = -20V
Q_g	Total Gate Charge	–––	–––	13	nC	I_D = -2.0A
Q_{gs}	Gate-to-Source Charge	–––	–––	3.2		V_{DS} = -160V
Q_{gd}	Gate-to-Drain ("Miller") Charge	–––	–––	7.3		V_{GS} = -10V, See Fig. 6 and 13 ④
$t_{d(on)}$	Turn-On Delay Time	–––	12	–––	ns	V_{DD} = -100V
t_r	Rise Time	–––	17	–––		I_D = -2.0A
$t_{d(off)}$	Turn-Off Delay Time	–––	19	–––		R_G = 24Ω
t_f	Fall Time	–––	15	–––		V_{GS} = -10V, See Fig. 10 ④
L_D	Internal Drain Inductance	–––	4.5	–––	nH	Between lead, 6mm (0.25in.) from package and center of die contact
L_S	Internal Source Inductance	–––	7.5	–––		
C_{iss}	Input Capacitance	–––	180	–––	pF	V_{GS} = 0V
C_{oss}	Output Capacitance	–––	66	–––		V_{DS} = -25V
C_{rss}	Reverse Transfer Capacitance	–––	12	–––		f = 1.0MHz, See Fig. 5



Source-Drain Ratings and Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	–––	–––	-2.0	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	–––	–––	-8.0		
V_{SD}	Diode Forward Voltage	–––	–––	-5.8	V	T_J = 25°C, I_S = -2.0A, V_{GS} = 0V ④
t_{rr}	Reverse Recovery Time	–––	130	200	ns	T_J = 25°C, I_F = -2.0A
Q_{rr}	Reverse Recovery Charge	–––	700	1050	nC	di/dt = -100A/µs ④
t_{on}	Forward Turn-On Time	Intrinsic turn-on time is negligible (turn-on is dominated by L_S+L_D)				



Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 11)

② Starting T_J = 25°C, L = 51mH
R_G = 25Ω, I_{AS} = -2.0A. (See Figure 12)

③ I_{SD} ≤ -2.0A, di/dt ≤ -250A/µs, V_{DD} ≤ $V_{(BR)DSS}$,
T_J ≤ 150°C

④ Pulse width ≤ 300µs; duty cycle ≤ 2%.

⑤ t =60s, f=60Hz.

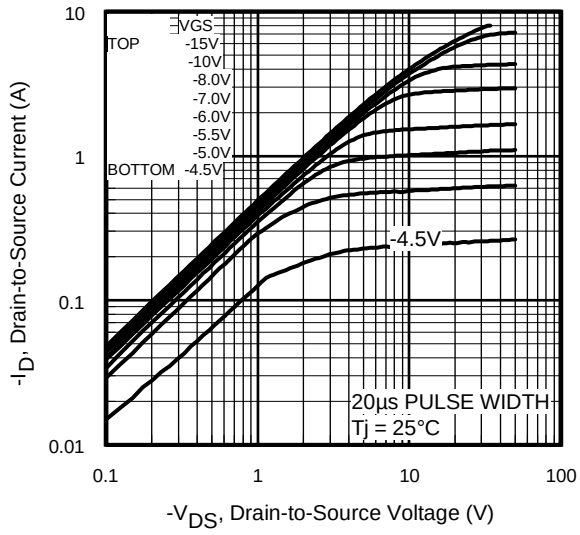

Fig 1. Typical Output Characteristics, T_J = 25ºC

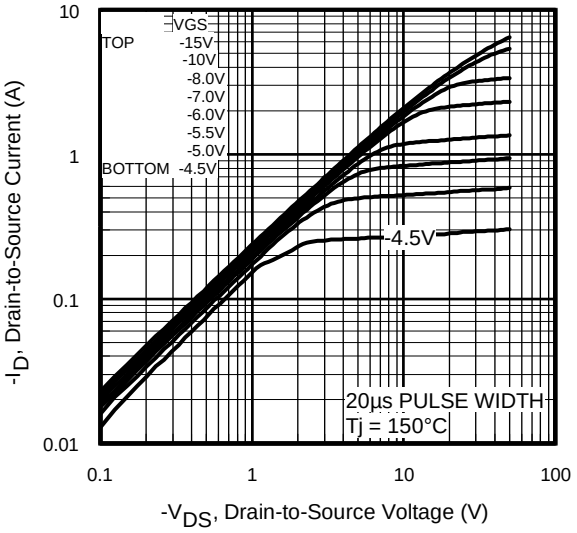

Fig 2. Typical Output Characteristics, T_J = 150ºC

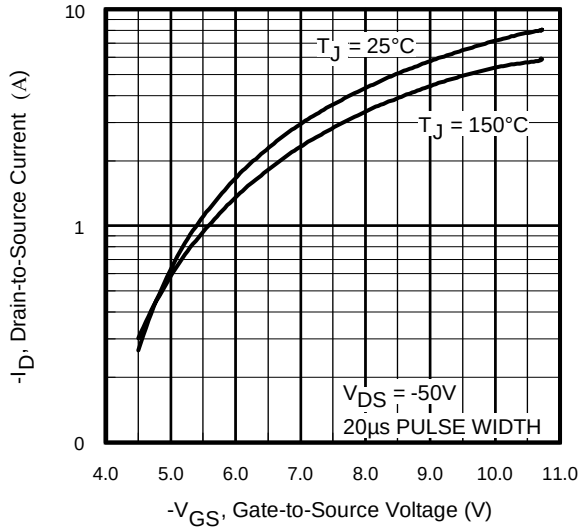

Fig 3. Typical Transfer Characteristics

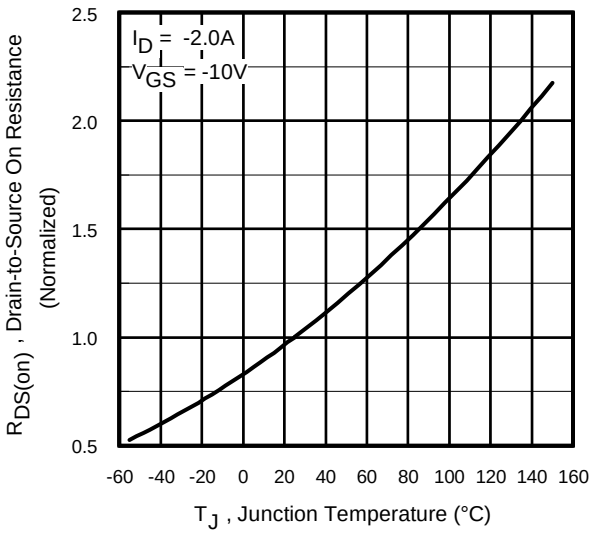

Fig 4. Normalized On-Resistance Vs. Temperature

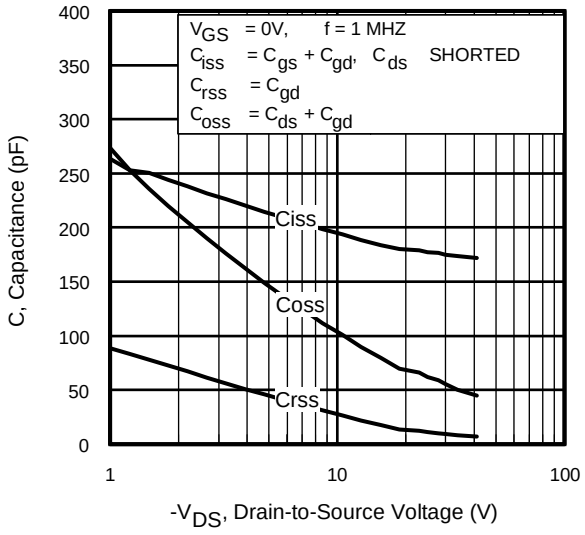

Fig 5. Typical Capacitance Vs. Drain-to-Source Voltage

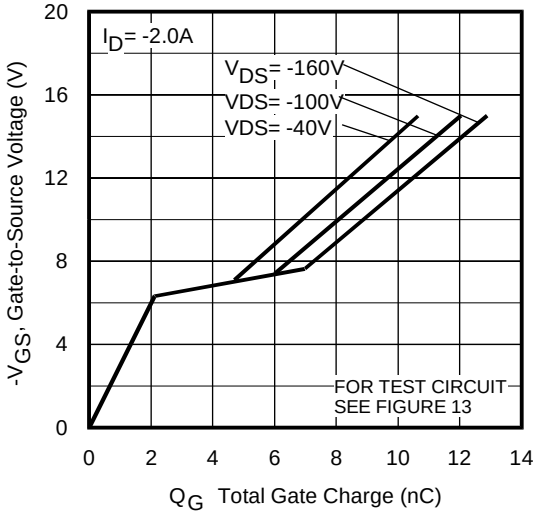

Fig 6. Typical Gate Charge Vs. Gate-to-Source Voltage

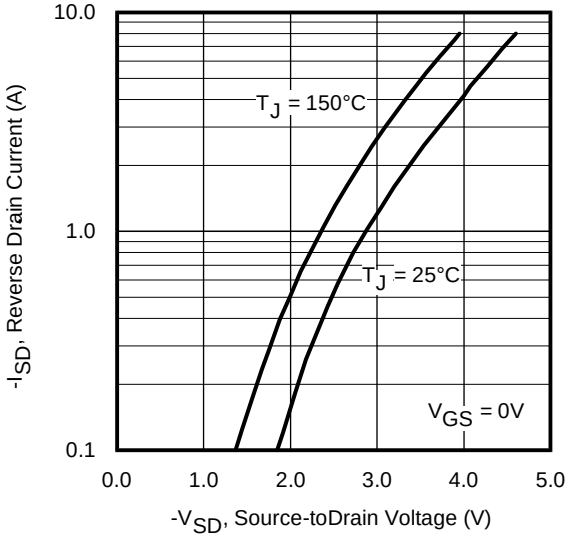

Fig 7. Typical Source-Drain Diode Forward Voltage

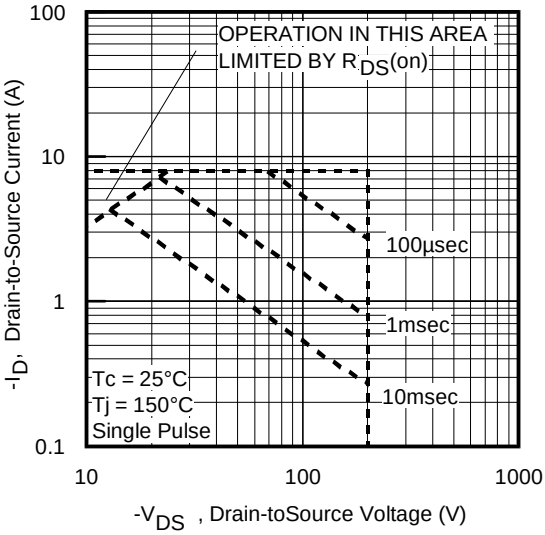

Fig 8. Maximum Safe Operating Area

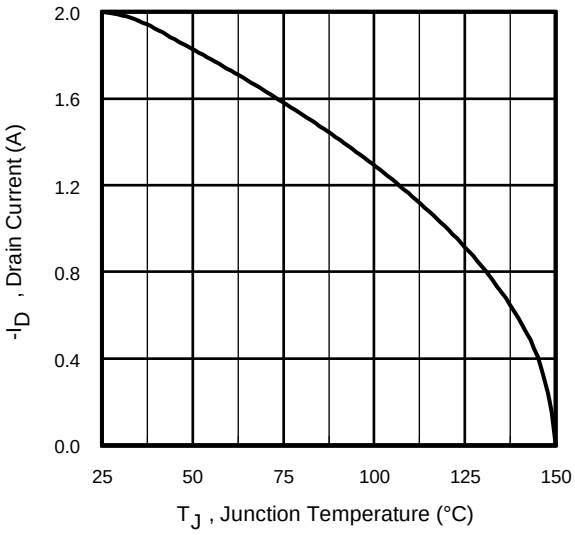

Fig 9. Maximum Drain Current Vs. Case Temperature

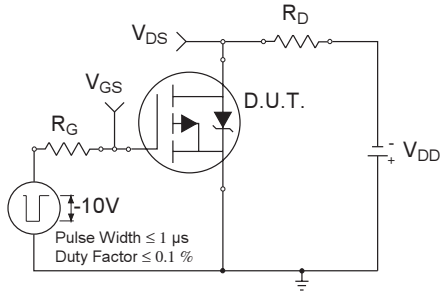

Fig 10a. Switching Time Test Circuit

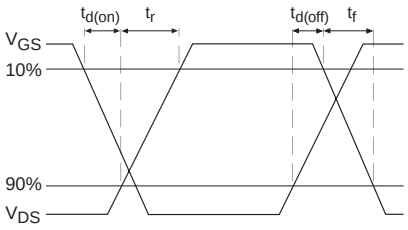

Fig 10b. Switching Time Waveforms

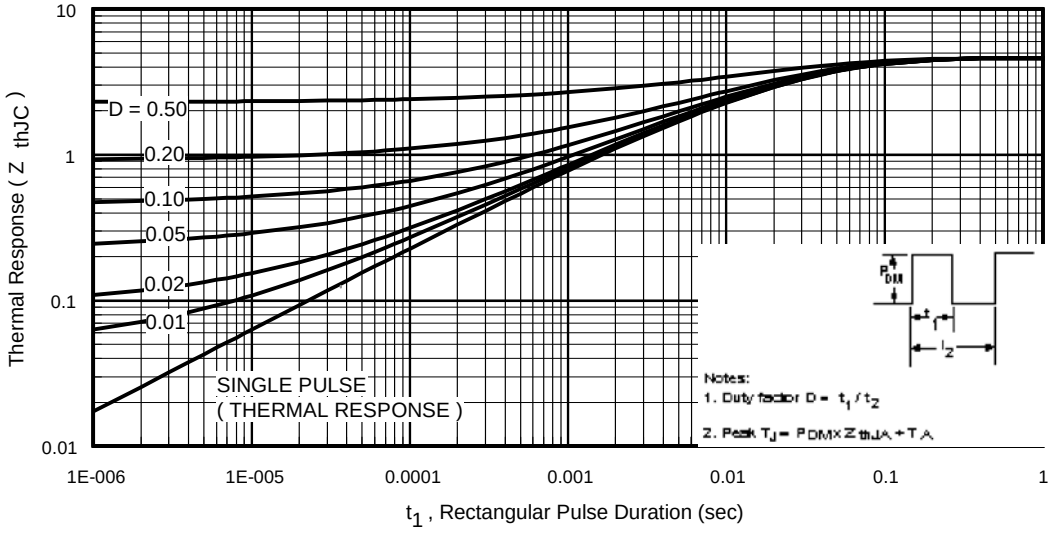

Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

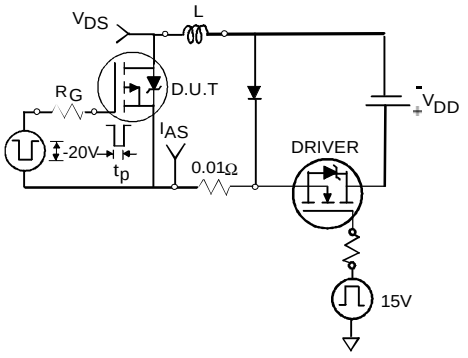

Fig 12a. Unclamped Inductive Test Circuit

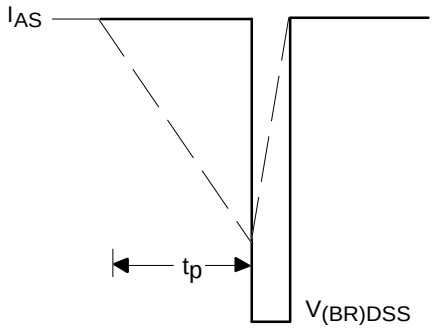

Fig 12b. Unclamped Inductive Waveforms

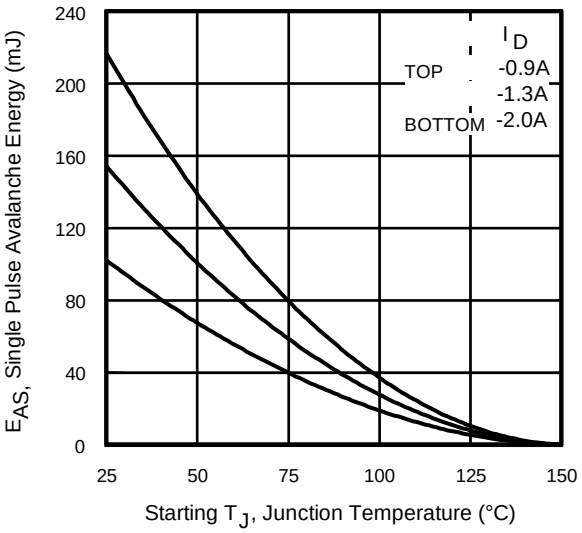

Fig 12c. Maximum Avalanche Energy Vs. Drain Current

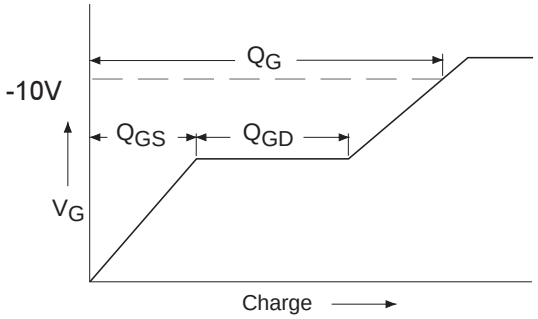

Fig 13a. Basic Gate Charge Waveform

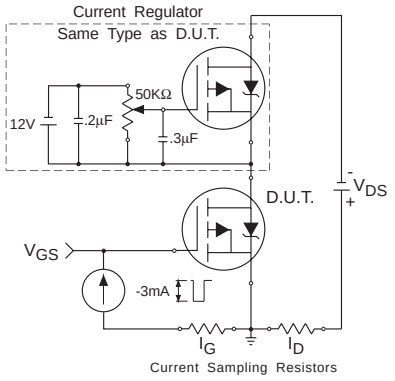

Fig 13b. Gate Charge Test Circuit

Peak Diode Recovery dv/dt Test Circuit

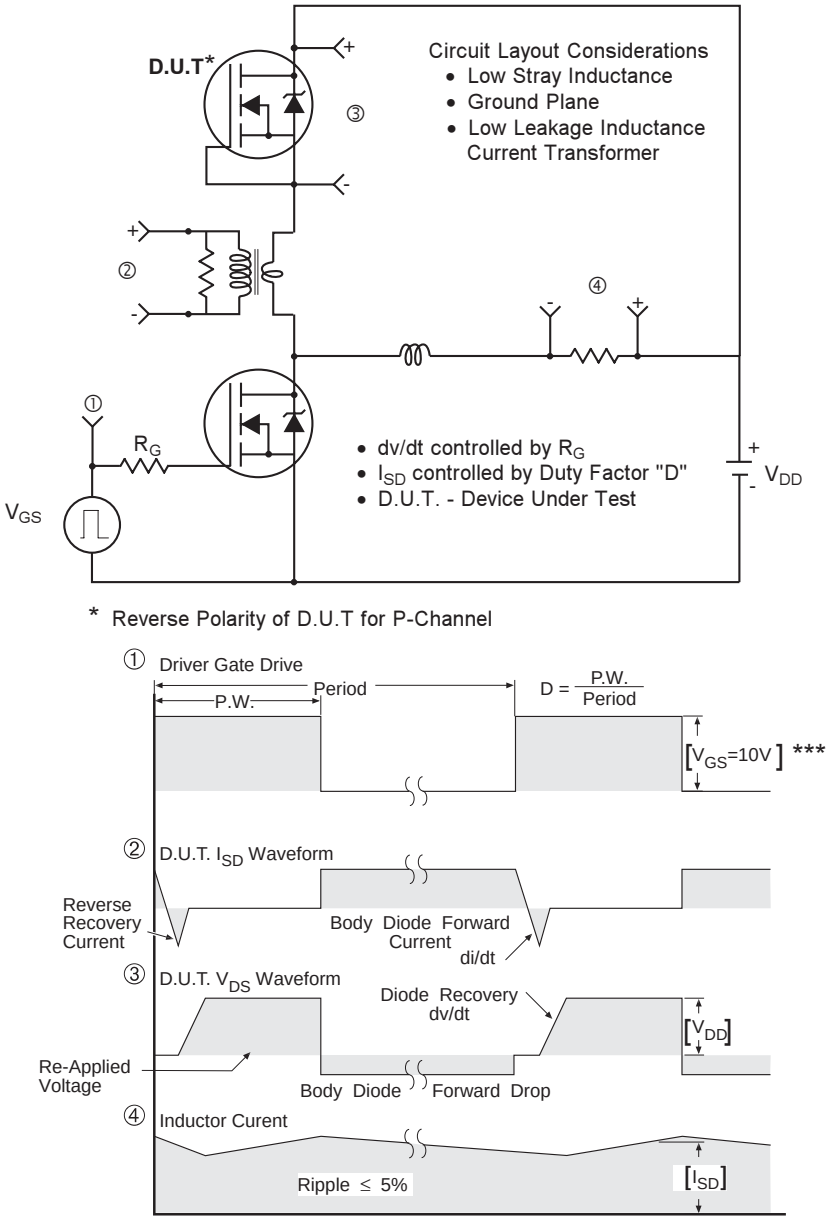

Fig 14. For P-Channel HEXFETS

IRFI9610GPbF

International
IOR Rectifier

TO-220 Full-Pak Package Outline

Dimensions are shown in millimeters (inches)

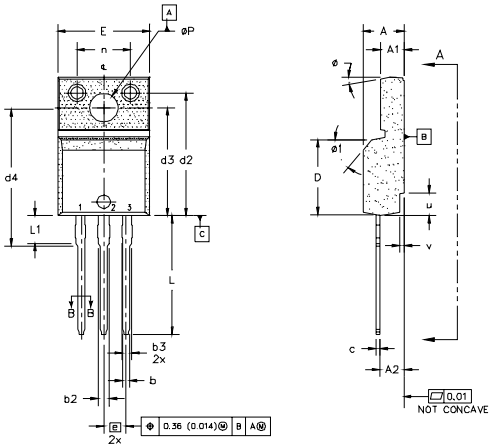



NOTES:
1.0 DIMENSIONING AND TOLERANCING PER ASME Y14.5 M- 1994.
2.0 DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
3.0 LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.
4.0 DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
5.0 DIMENSION b1 APPLY TO BASE METAL ONLY.
6.0 STEP OPTIONAL ON PLASTIC BODY DEFINED BY DIMENSIONS u & v.
7.0 CONTROLLING DIMENSION : INCHES.

SYMBOL	DIMENSIONS				NOTES
	MILLIMETERS		INCHES		
	MIN.	MAX.	MIN.	MAX.	
A	4.57	4.83	0.180	0.190	
A1	2.57	2.83	0.101	0.114	
A2	2.51	2.85	0.099	0.112	
b	0.622	0.89	0.024	0.035	
b1	0.622	0.838	0.024	0.033	5
b2	1.229	1.400	0.048	0.055	
b3	1.229	1.400	0.048	0.055	
c	0.440	0.629	0.017	0.025	
c1	0.440	0.584	0.017	0.023	
D	8.65	9.80	0.341	0.386	4
d1	15.80	16.12	0.622	0.635	
d2	13.97	14.22	0.550	0.560	
d3	12.30	12.92	0.484	0.509	
d4	8.64	9.91	0.340	0.390	
E	10.36	10.63	0.408	0.419	4
e	2.54 BSC		0.100 BSC		
L	13.20	13.73	0.520	0.541	
L1	3.10	3.50	0.122	0.138	3
n	6.05	6.15	0.238	0.242	
øP	3.05	3.45	0.120	0.136	
u	2.40	2.50	0.094	0.098	6
v	0.40	0.50	0.016	0.020	6
ø	3°	7°	3°	7°	
ø1		45°		45°	

LEAD ASSIGNMENTS

HEXFET

1.- GATE
2.- DRAIN
3.- SOURCE

IGBTs, CoPACK

1.- GATE
2.- COLLECTOR
3.- EMITTER

TO-220 Full-Pak Part Marking Information

EXAMPLE: THIS IS AN IRFI840G
WITH ASSEMBLY
LOT CODE 3432
ASSEMBLED ON WW 24 1999
IN THE ASSEMBLY LINE "K"

Note: "P" in assembly line position indicates "Lead-Free"

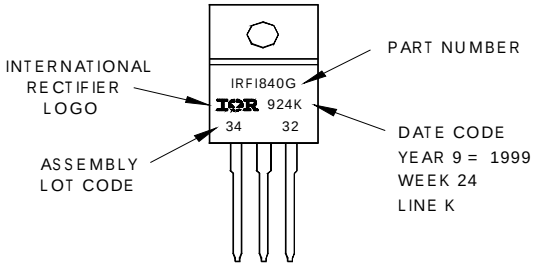

Data and specifications subject to change without notice.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.07/04